


| REVISIONS | | | | |
|-----------|-----|---|------------|------------------|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |
| A | | REPLACES REV NEW WITH CHANGE. | 99-02-03 | KIM LE |
| | | DIRECT UPDATE: | 99-02-03 | JOHN HARRENSTEIN |
| | | 1) ADDED FLAGNOTE 7 AND ITS CALLOUT TO SHEET 2. REASON: 05 SEVERITY: 09 | 99-02-03 | DAMIR KORO |
| B | | REPLACES REV. "A" WITH CHANGE | 2000-03-10 | Ken Trac |
| | | DIRECT UPDATE: | 2000-03-16 | John Harrenstein |
| | | 1) UPDATED MATING CONNECTOR PART NO. & VENDOR NAME FROM "SOURIAU S611-MG-05W2-P0008-LM" TO "FRAMATOME CONNECTORS USA INC. S611-MG-05W2-P0008L". 2) UPDATED DWG FORMAT TO HONEYWELL. REASON: 05 SEVERITY: 09 | 2000-01-16 | Gary Sturgis |
| C | | REPLACES REV. "B" WITH CHANGE. | 2002-4-15 | Kim Le |
| | | DIRECT UPDATE: | 2002-4-15 | John Harrenstein |
| | | 1) REVISED NOTE 4 WAS "POWER... 15 WATTS WITH NO WARNINGS, 22 WATTS WITH WARNING...CONNECTED". REASON: 05 SEVERITY: 09 | | |
| D | | REPLACES REV "C" WITH CHANGE | 2003-3-18 | Kim Le |
| | | DIRECT UPDATE: | 2003-3-18 | John Harrenstein |
| | | 1) DELETED "+.010/- .000 CONNECTOR TO BOTTOM OF UNIT" DIMENSION IN ZONE B2 ON SHEET 2. 2) ADDED FLAGNOTE 8 AND ITS CALL-OUT TO SHEET 2. 3) ADDED VIEW A TO SHEET 2. REASON: 05 SEVERITY: 09 | | |

NOTES: UNLESS OTHERWISE SPECIFIED,

- COOLING AIR NOT REQUIRED.
- WEIGHT: 7.0 LBS MAX.
- MINIMUM IDENTIFICATION INFORMATION:
PART NO. 965-0976-OXX-XXX-XXX
SERNO:
MFG DATE:
TSO-C92c
TSO-C117a
ENVIR CAT: DO-160C
SOFTWARE: DO-178B LEVEL C,D
MODIFICATION STATUS
CUSTOMER LABEL IF APPLICABLE

CONFIGURATION DATABASE MOD STATUS IF APPLICABLE

APPLICATION S/W MOD STATUS IF APPLICABLE
- POWER DISSIPATION IS 25 WATTS WITH NO WARNINGS, 30 WATTS WITH WARNING AND 8 OHM SPEAKER CONNECTED.
- THIS DIMENSION CONTROLS WIDTH OF FRONT PANEL AND IS TO BE MEASURED FROM THE 2.25 ±.04 DIMENSION.
- THE SYMBOL  INDICATES THE CENTER OF GRAVITY OF UNIT.
- SHELL CAVITY C, POSITION 1 WILL BE LOADED WITH SIZE 5 COAX CONTACT (REAR INSERTABLE). SEE MANUFACTURER'S SPEC FOR PART NO.
- THE BOTTOM OF REAR PANEL ASSEMBLY SHALL BE FLUSH TO .010 BELOW THE BOTTOM SURFACE OF CHASSIS AS SHOWN IN VIEW A.

INTERFACE CONTROL DRAWING

Typed names constitute approval. Actual signatures on file at Honeywell in Redmond Wa.

This document is an unpublished work. Copyright 1999,2003 Honeywell International Inc. All rights reserved







This document and all information and expression contained herein are the property of Honeywell International Inc, and is provided to the recipient in confidence on a "need to know" basis. Your use of this document is strictly limited to a legitimate business purpose requiring the information contained therein. Your use of this document constitutes acceptance of these terms.

| | | |
|---------------------------|---|---|
| | D | D |
| | C | B |
| | B | B |
| | A | A |
| | - | - |
| SHEET | 1 | 2 |
| REVISION STATUS OF SHEETS | | |

| | | |
|-------------|-----------|----------|
| -201 | 960-0336 | 960-0336 |
| DASH NO. | NEXT ASSY | USED ON |
| APPLICATION | | |

| | | | | | | |
|---|---|-------|----------------------------------|-----------------|---------------|--|
| MATERIAL | UNLESS OTHERWISE SPECIFIED | | | CONTRACT NUMBER | | Honeywell International Inc. Redmond, Washington 98073-9701 Honeywell |
| | ALL DIM. ARE IN INCHES | TOL | .XX ± — .XXX ± — ANGLE ± — | DRAWN | K.L. 99-01-07 | |
| | INTERPRET DRAWING PER DOD-STD-100. | CHECK | J.H. 99-01-07 | ENGR | G.S. 99-01-07 | |
| | BREAK-ALL SHARP EDGES | MFG | M.S. 99-01-07 | GA | O.L. 99-01-07 | |
| PRECIOUS METAL INDICATOR CODE: NA | SURFACE ROUGHNESS <input checked="" type="checkbox"/> | | APPD | ---- | --- | |
| DWG TITLE | | | SIZE | CAGE CODE | DWG NO. | REV. |
| ENHANCED GROUND PROXIMITY WARNING SYSTEM (EGPWS), 115 VAC WITH GPS, OUTLINE | | | D | 97896 | 960-0336-201 | D |
| SCALE 1/1 | | | WT. | 2 | SHEET 1 OF 2 | H-DFORM/REV-A |

EGPWS

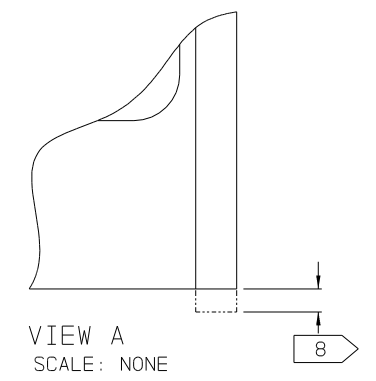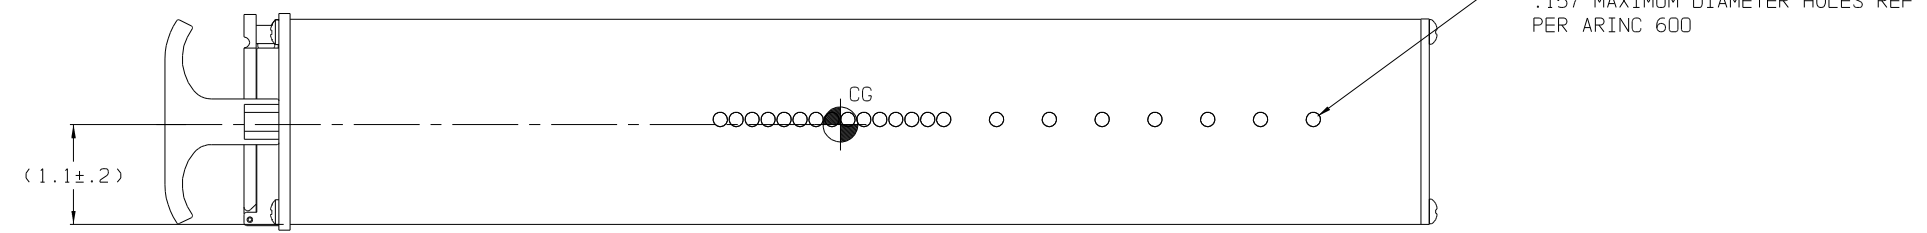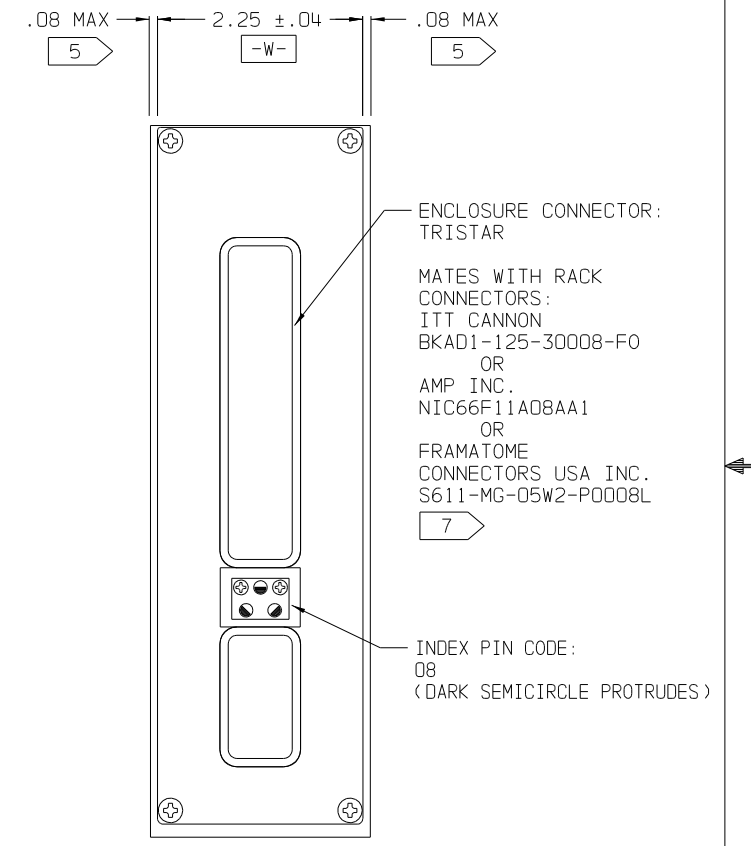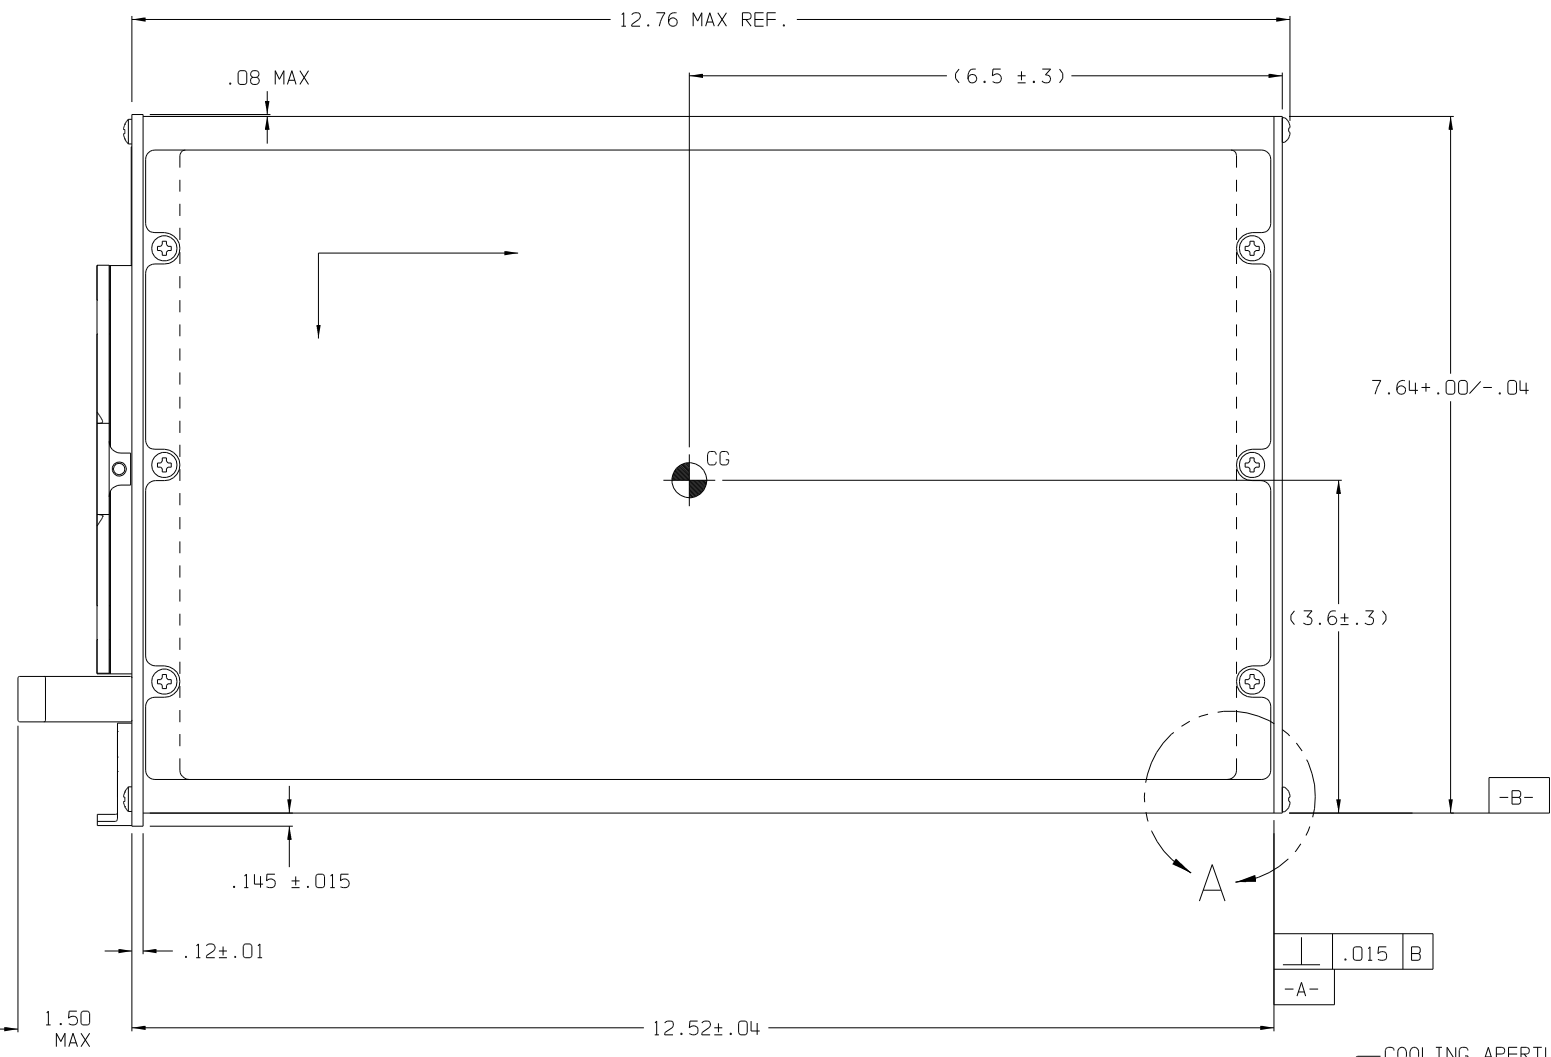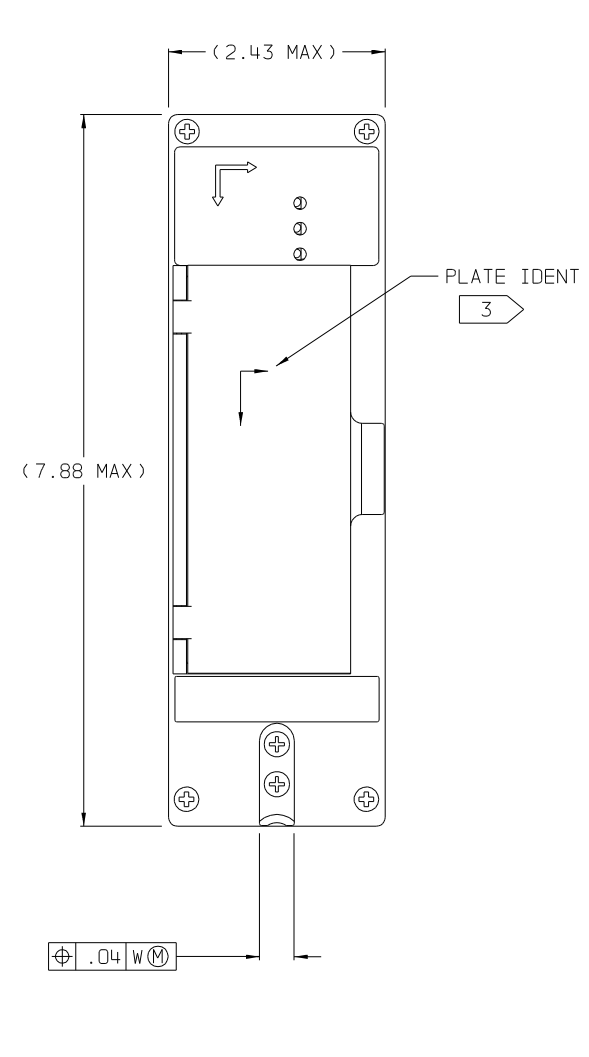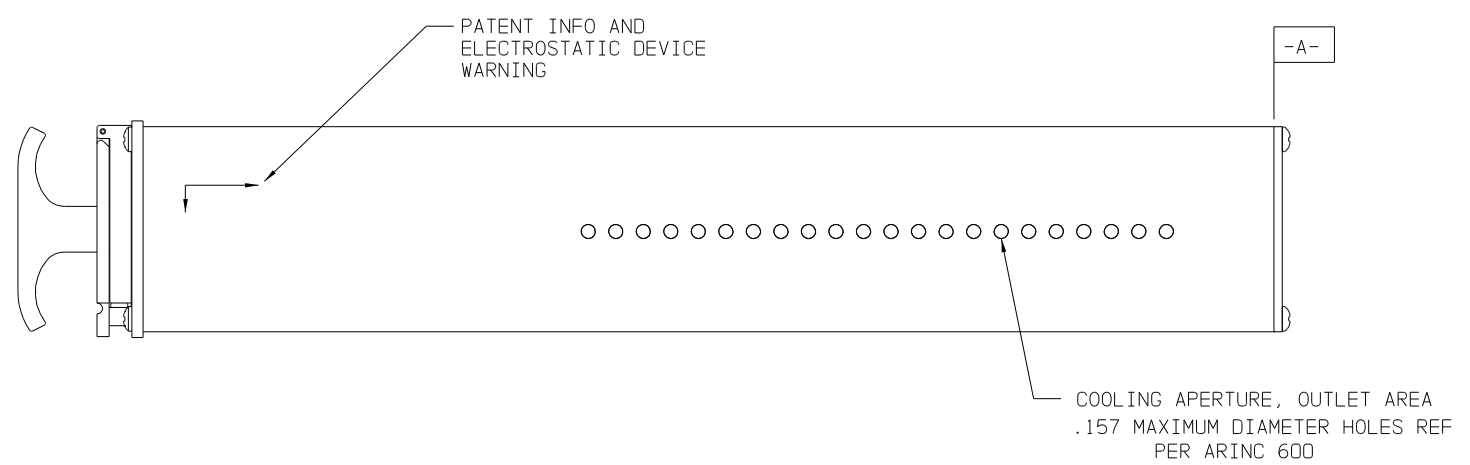

PART NO. 960-0336-OXX