


HX1750

MIL-STD-1750A Microprocessor

The HX1750 is a true single chip implementation of the MIL-STD-1750A instruction set architecture, fabricated on Honeywell's Silicon on Insulator CMOS (SOI-IV) process. It combines a fast 16 bit microprocessor, a 40 bit floating point processor, counters, timers and other peripheral interface logic – all on a single chip. Advanced architectural features, innovative circuit design, and the high density and performance characteristics of the SOI-IV process enable device operation up to 40 MHz over the full military temperature range, even after exposure to ionizing radiation.

The HX1750 offers a wide range of features that provide for ease of use, versatility and minimum external components. Simplified memory interface and adjustable cycle times allows the use of slower, low cost memory devices.

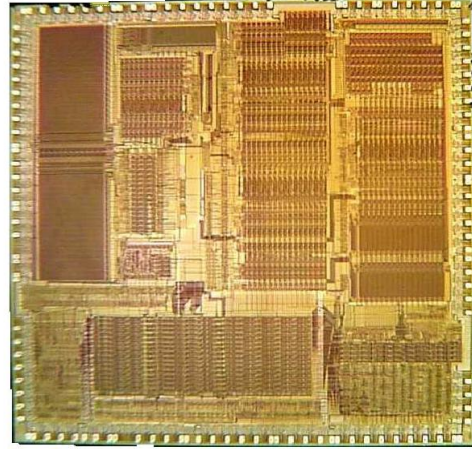

Most of the options in the MIL-STD-1750A standard are implemented on the HX1750 chip as listed below:

- Discrete I/O Commands
- DMA Commands
- Console Interface Commands
- Programmed I/O Commands
- IOIC Registers
- Expanded Memory Addressing
- Memory Block Protect
- Two Interval Timers
- Trigger Go Counter
- Start-ROM Support

FEATURES

- Fabricated on Honeywell's Radiation Hardened 0.65 μ m L_{eff} SOI CMOS Silicon On Insulator (SOI-IV) process
- Single Supply 5V
- TTL and CMOS Compatible I/O
- 3.3 MIPS DAIS Mix Including Floating Point
- Maximum Clock Rates 40 MHz, Fully Static
- Separate Address and Data I/O Busses
- Two Programmable Timers
- Trigger-go Counter
- Sixteen Levels of Vectored Interrupts
- I/O Maintenance Console Interface
- Expanded Addressing to 1Meg with MMU
- Total Dose Hardness >1x10⁵ rad(Si)
- Soft Error Rate < 1x10⁻⁵ Errors/1750-day
- No Latchup
- Low Power

HX1750

Several features are incorporated into the HX1750 to simplify the system interface, minimize external components, reduce external memory speed requirements, and ease software development.

- A separate address and data bus eliminates the need for external PIC chip, address demultiplexers and latches.
- Fast address and data buffers provide signals early in the cycle allowing use of slower, low cost memories.
- Enhanced Maintenance Console.
- Standard memory addressing to 64K – expanded to 1Meg with MMU.
- Access Lock and Key implemented.
- Simple DMA control implemented
- Coprocessor supported in separate address space.
- Variable System clock – internal programmable divider (tie Scale pin high or low) cuts the internal bus cycle time in half.
- Data, Instruction, and I/O access time independently programmable.
- Full synchronous or asynchronous operation – programmable wait states for instructions,

data, and I/O. Asynchronous operation is slaved to an external RDY signal.


- Enhanced set of Built-In-Functions.
- Enhanced Configuration Register.
- Enhanced Maintenance Console – with single step operation.

The processor executes all mandatory MIL-STD-1750A instructions including floating point. Interrupts, fault handling, memory expansion, and I/O and the optional instructions related to these operations are also supported in accordance with MIL-STD-1750A. All instructions are re-startable after access faults for true demand paging operation.

RADIATION CHARACTERISTICS

The HX1750 has inherent radiation tolerance because it is manufactured on SOI-IV CMOS technology and has many cells from a radiation hardened library. However, full radiation analysis and verification was not performed and therefore the radiation performance is not guaranteed.

ORDERING INFORMATION

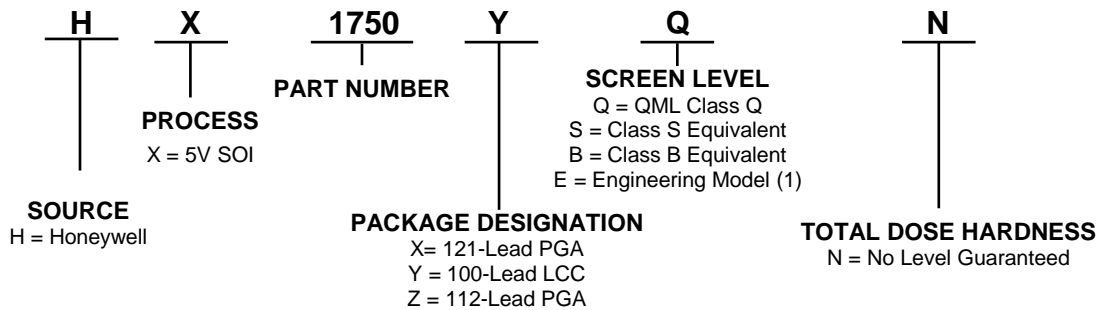

Note 1 – Engineering Model Description: Parameters are tested -55°C to 125°C and 24 hour burn-in.

Standard Microcircuit Drawing

The HX1750 Microprocessor can be ordered under the SMD drawing 5962-0520701.

Orders may be faxed to 763-954-2051. Please contact our Customer Service Representative at 1-800-323-8295 for further information.

For more information about Honeywell's family of radiation hardened integrated circuit products and services, visit www.honeywell.com/radhard.

This product and related technical data is subject to the U.S. Department of State International Traffic in Arms Regulations (ITAR) 22 CFR 120-130 and may not be exported, as defined by the ITAR, without the appropriate prior authorization from the Directorate of Defense Trade Controls, United States Department of State. Diversion contrary to U.S. export laws and regulations is prohibited. This datasheet includes only basic marketing information on the function of the product and therefore is not considered technical data as defined in 22CFR 120.10.

Honeywell reserves the right to make changes to any products or technology herein to improve reliability, function or design. Honeywell does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.

Honeywell International Inc.
12001 Highway 55
Plymouth, MN 55441
1-800-323-8295

Form #900393
April 2009
©2009 Honeywell International Inc.

Honeywell